


### 产品外形 Product appearance

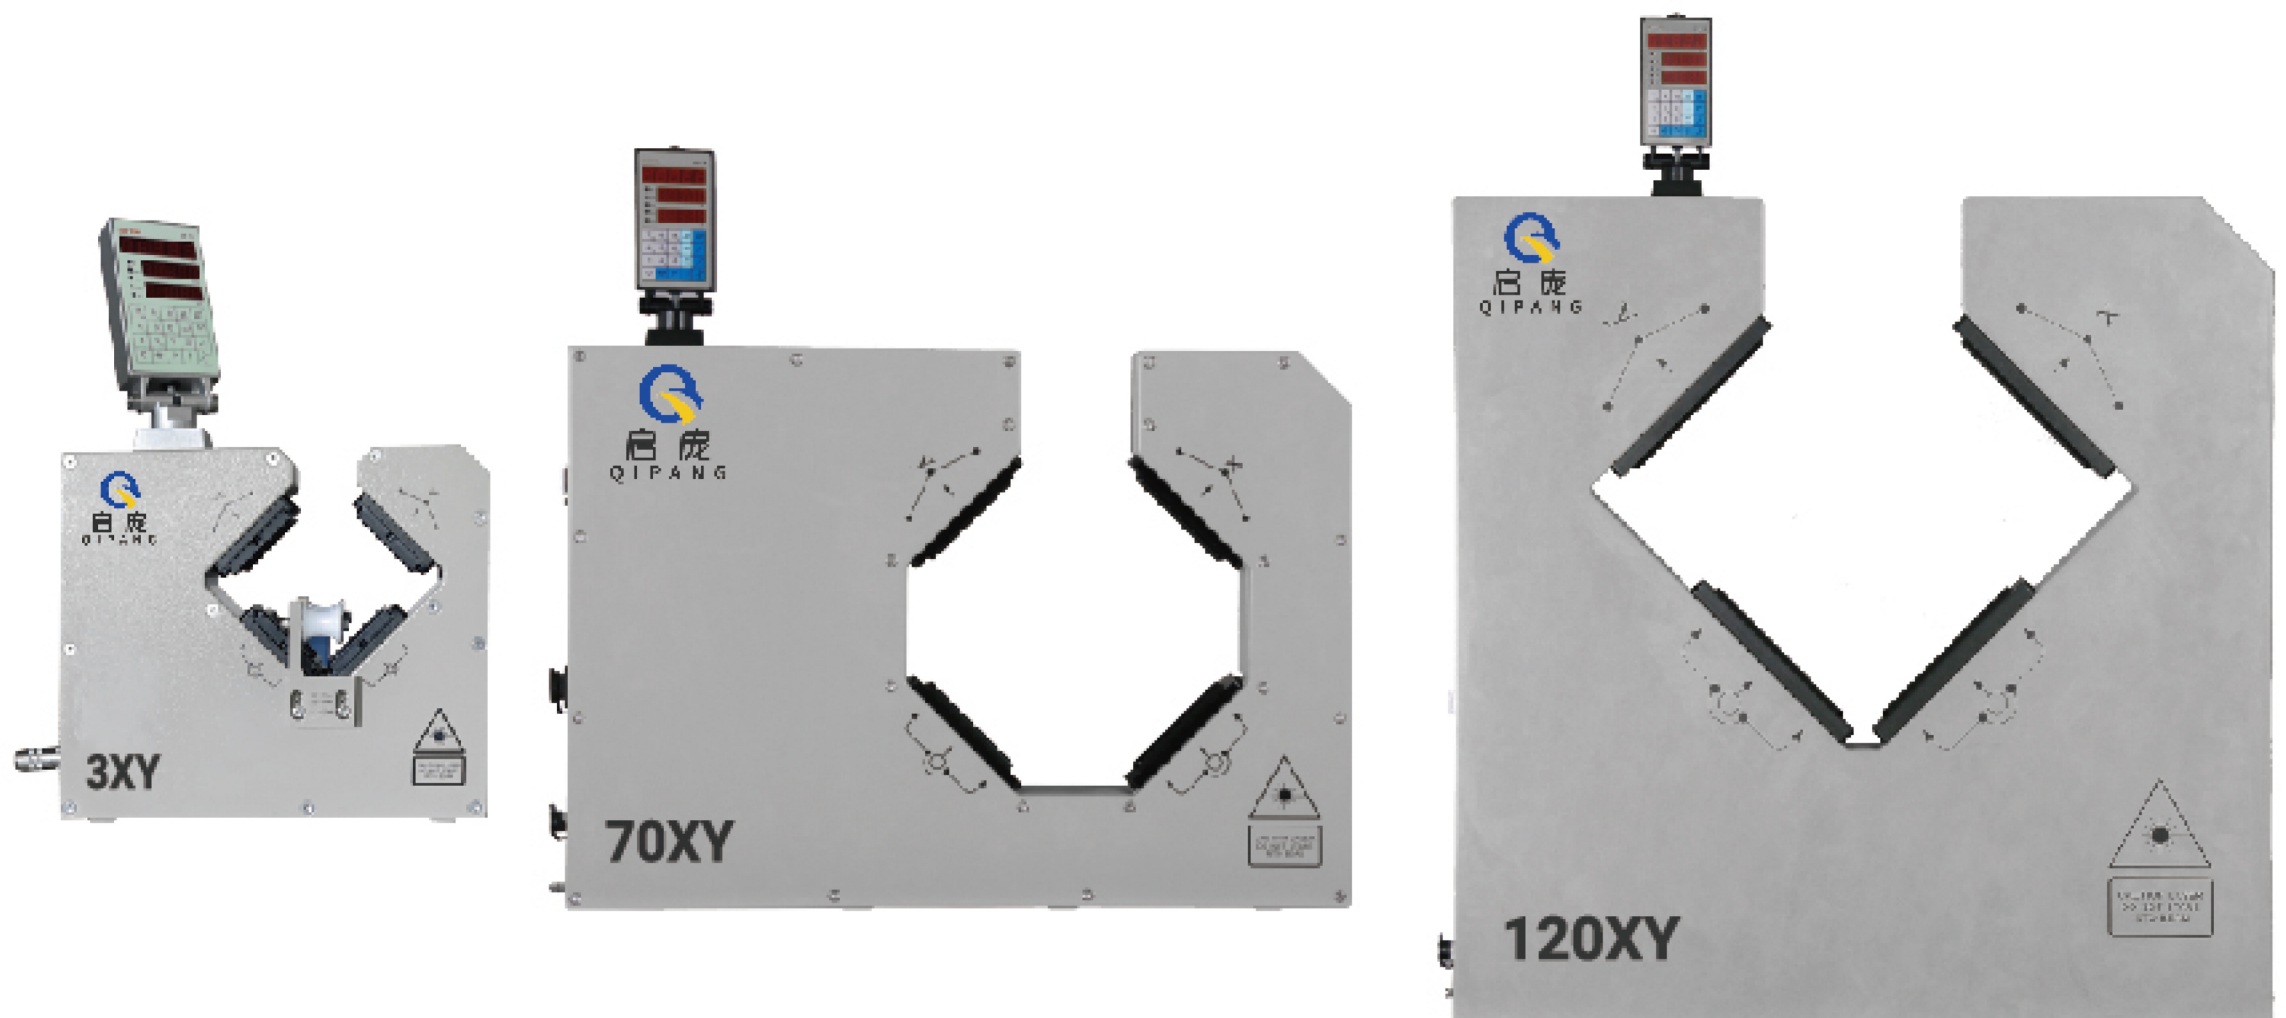

### 参数表 Parameter Table

型号 Model	3XY	70XY	120XY	170XY
测量轴数 Measuring axis number	双轴 Double Axis			
测量范围 Measuring range	0.05-3mm, 0.002"-1/8"	1 ~ 70mm, 1/25"-2 3/4"	1 ~ 120mm, 1/25"-4 23/32"	1 ~ 170mm, 1/25"-6 11/16"
测量精度 Measuring accuracy	$\pm 1\mu\text{m} \pm 0.008\% \times XZ$ $\pm 10\mu\text{m} \pm 0.008\% \times XZ$ (Xz:标称直径-Xz:nominal diameter)			
测径仪扫描速度 Scanning speed of diameter gauge	1400次/秒 1400 times/second			
分辨率 Resolution	0.001mm			
仪器供电电压 Power supply voltage	AC220V $\pm$ 10% 50HZ			
环境温度 Ambient temperature	-5 ~ 40°C			
通讯接口 Communication interface	RS485(Modbus RTU)、可选配网口 (Optional network port: Modbus TCP/Profinet)			
可选配件 Optional accessories	支架、串口线、远程控制器、远程显示器 Bracket, serial line, remote controller, remote display			
功耗 Power consumption	$\leq 12\text{W}$			
重量 Weight	5KG	16KG	30KG	27KG