


### 产品外形

### Product appearance

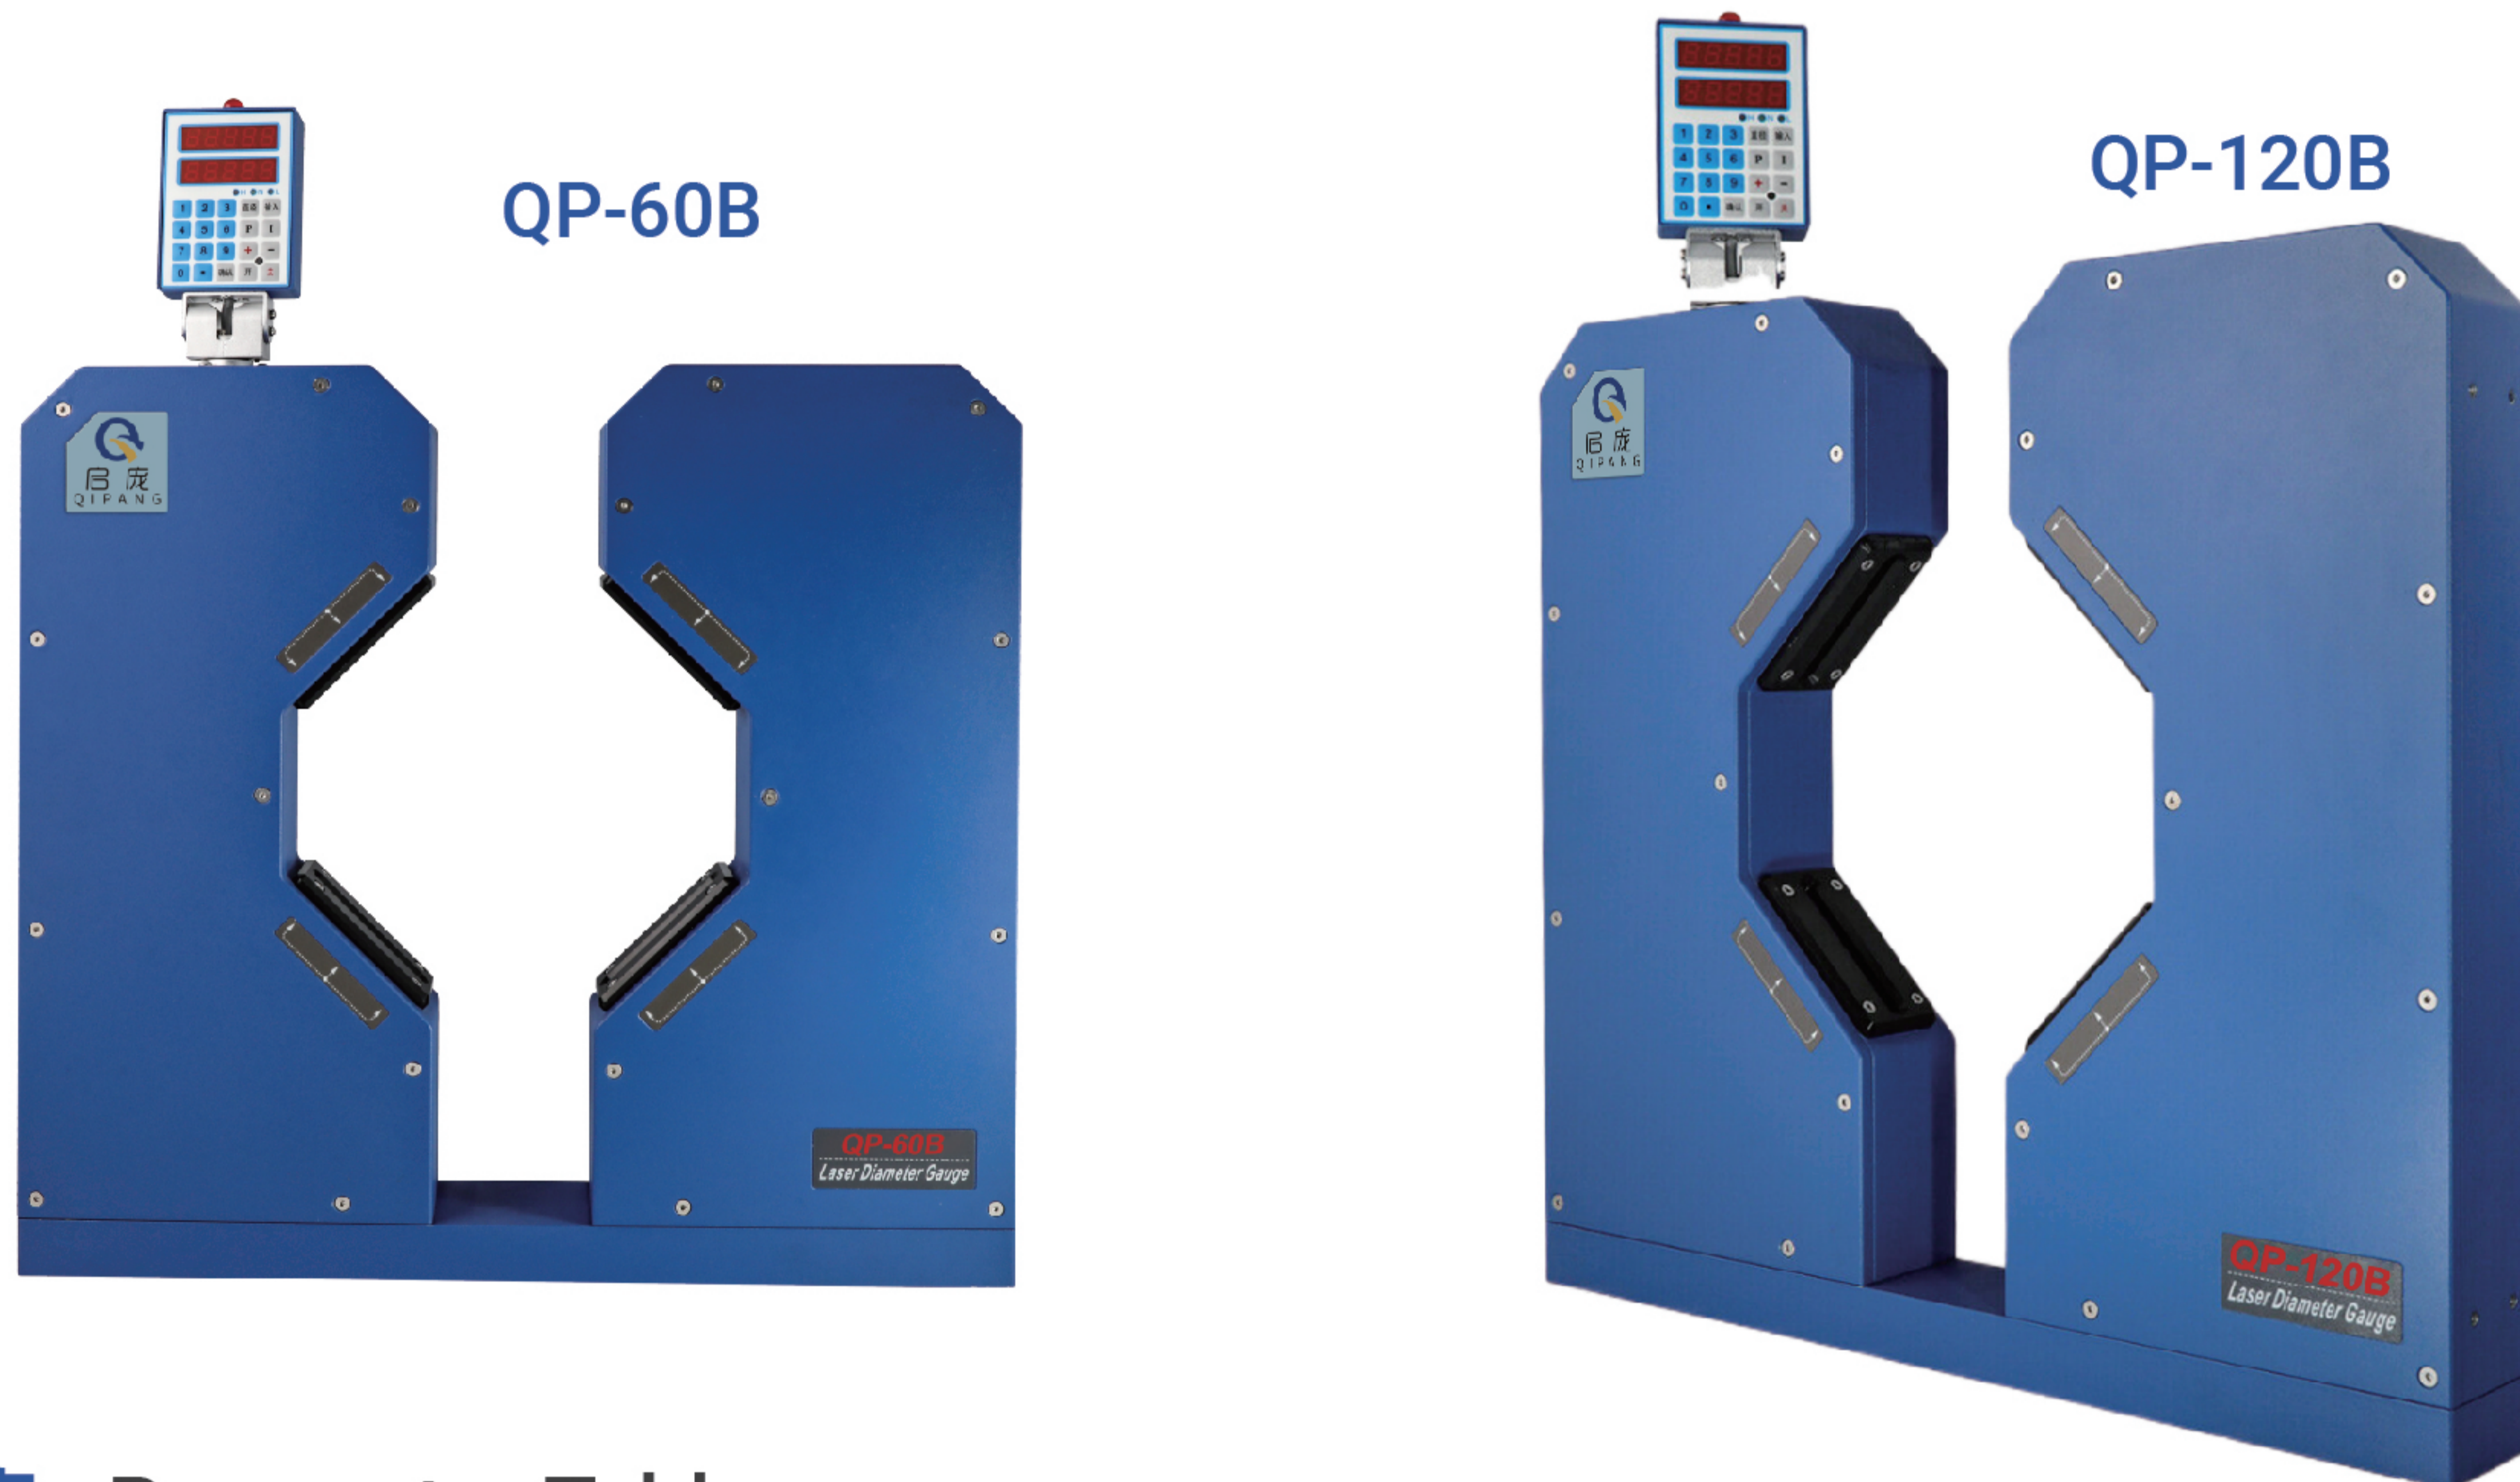

### 参数表 Parameter Table

型号 Model	QP-60B	QP-70B	QP-100B	QP-120B
测量范围 Measuring range	0.1mm-60mm、 1/256"-2 3/8"	0.1mm-70mm、 1/256"-2 3/4"	1mm-100mm、 1/25.4"-3 15/16"	1mm-120mm、 1/25"-4 23/32"
测量精度 Measuring accuracy	$\pm 5\mu\text{m} \pm 0.008\%$ Dz mm	$\pm 20\mu\text{m} \pm 0.008\%$ Dz mm ("Dz" is the actual diameter of the measured object)		
分辨率 Resolution	0.001mm			
产品尺寸 (L*W*H) Product size	500*64*615mm	500*64*615mm	550*64*665mm	540*78*505mm
重量 Weight	8.3KG	11.8KG	14KG	15.7KG
测径仪扫描速度 Scanning speed of diameter gauge	1000次扫描周期/秒 1000 times scanning cycle/second			
仪器供电电压 Power supply voltage	AC220V $\pm 10\%$ 50Hz			
环境温度 Ambient temperature	-10 ~ 45°C			
相对湿度 Relative humidity	$\leq 85\%$ (无冷凝水)(no condensation water)			
显示方式 Display means	双排5位数码管显示 two-row 5-digit pipe display			
工作频率 Working frequency	50/60Hz			
通讯接口 Communication interface	RS485 (support Modbus RTU)			
功耗 Power consumption	$\leq 15\text{W}$			